

FLOS

05.3555.40.DA White

Multi Spot Mini Dali Version

Designed by FLOS Architectural, 2024




7W - 397lm - 3000K - CRI> 90 - Beam° 32

LED lighting module with 14 spotlights and low glare, to be installed in The Infra-Structure system. For wireless lighting control, choose integrated Casambi versions.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

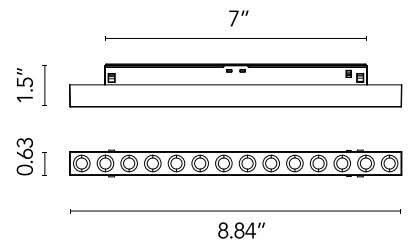

Main specifications

Mounting	Track
Environments	Indoor dry location
Light sources included	Yes
LED type	Power LED
Number of lamps	1
Power (W)	7
Source flux (lm)	650
System flux (lm)	397
Efficacy (lm/W)	52

Physical

Color	White
Field cuttable	No
Orientation	Fixed
Length (in)	8.9
Net weight (lb)	0.25
Gross weight (lb)	0.4
Package height (in)	2.7
Package width (in)	10.1
Package length (in)	2.8
Package volume (in)	76.4
IP internal	20

Download

Family spec sheet	↓ ZIP
Family spec sheet	↓ ZIP
Mounting instructions	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
-----------	-----------------------

Technical Drawings

2D	↓ ZIP
3D	↓ ZIP



Schematic light drawing



Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
McAdam steps (SDCM)	3
Rf fidelity index	93
Rg gamut index	100
LED Life / Failure Ratio	L90B50>60.000h_Tc85°C
Beam angle C0-180 (°)	32
Beam angle C90-270 (°)	32
Extreme cut off	Yes
UGR _L	<10

Electrical

Insulation class	III
Main voltage (Vac)	48
Forward voltage (V)	48
LED current (mA)	150
Driver	Remote
Dimmable	Yes
Dimming type	Dimmable DALI 2
Dimming range (%)	1-100
Dimming interface	Remote Dimmable (Dimmer Not Included)