

FLOS

■ F4640030 Black


OK

Designed by Konstantin Grcic, 2014

18W - 1551lm - 2700K



A pendant light that feels as at home in an industrial space as it would in museum exhibit: The OK Light by German Designer Konstantin Grcic plays with expectations to provide functional light that is surprising and easily directed. It features an ultra-flat LED surface with edge-lighting technology that can be directed over 360 degrees. The electronic components are housed in a small rectangular box that slides vertically over the metal wire of the lamp, which is balanced by a cone-shaped counterweight. The OK Light features a soft-touch switch.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607005064
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	18
System flux (lm)	1551

Physical

Color	Black
Length (in)	7.87
Cord color	Black
Cord length (in)	157.480
Canopy color	Black
Canopy height (in)	0.787
Net weight (lb)	6.61
Gross weight (lb)	9.26
Package height (in)	5.51
Package width (in)	13.39
Package length (in)	15.35
Package volume (in)	1132.85
IP internal	20

Download

[Mounting instructions](#) PDF

[Mounting instructions](#) PDF

Photometric Files

[LDT / IES](#) LDT


Technical Drawings

[2D](#) ZIP

[3D](#) ZIP



Schematic light drawing



Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
Extreme cut off	No

Electrical


Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Remote included
Dimmable	Yes
Dimming type	Electronic 24V
Dimming interface	Dimmer Integrated
Plug type	Type A, Type C, Type G
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F

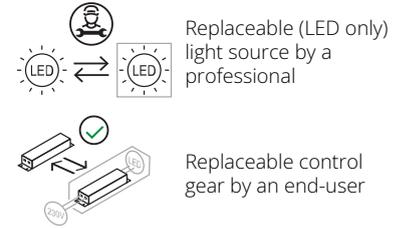

Spare Parts

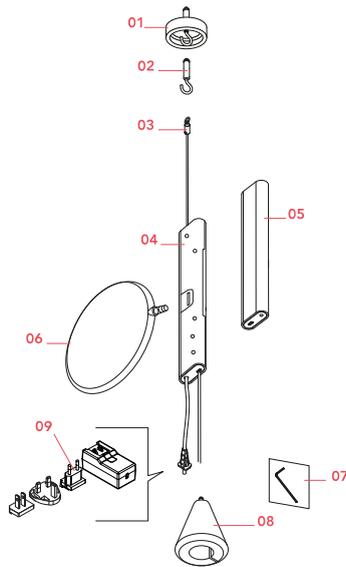

02.	Ok Anchor with hook	RF4640100
03.	Ok Steel cable 4mt.	RF4640200
03.	Ok Steel cable 6mt.	RF4640300
04.	Ok Internal lamp body assembly	RF4640400
06.	Ok Black led head assembly	RF28254
08.	Ok Counterweight	RF23023
09.	Black plug assembly kit & 24V driver	RF6600230



RF4640100

Ok Anchor with hook



RF4640200

Ok Steel cable 4mt.



RF4640300

Ok Steel cable 6mt.



RF4640400

Ok Internal lamp body assembly



RF28254

Ok Black led head assembly



RF23023

Ok Counterweight



RF6600230

Black plug assembly kit & 24V driver