
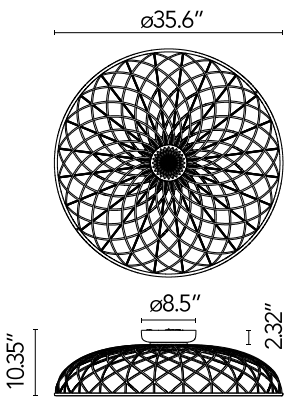


Skynest C

Designed by Marcel Wanders, 2022

57W - 1385lm - 2700-2900K - CRI> 90

Diffuse lighting hanging appliance. The dome is a combination of luminous and dark elements arranged into a network and formed of core structures covered with a thin interwoven colourful tubular mesh made from recycled and recyclable fabric produced from polyester. Every single luminous element is powered by special micro-connectors located at the top of the dome and is covered with a two-tone mesh, while the side facing the inside of the dome is always white in order to allow for optimal light emission from the LED module. The appliance is fitted with a built-in balancing system at the top of the dome which helps adjust its balance, making it perfectly stable. The bottom of the dome is completed by an aluminium ring that keeps the dome's entire network structure in place through a simple snap-fit system. The product is assembled with absolutely no glue so it can be fully separated to be recycled in the future and in case of any repairs or replacements. Available lamp finishes: Blue Tourmaline, Almond, Anthracite or Brick Red.Fitted with built-in electronics that allow for the use of different dimmer systems: 0-10V / 1-10V / DALI / PUSH.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

| | |
|------------------------|---------------------|
| EAN | 8059607076361 |
| Mounting | Ceiling |
| Environments | Indoor dry location |
| Light Source Type | LED |
| Light sources included | Yes |
| LED type | LED Module |
| Power (W) | 57 |
| System power (W) | 57 |
| System flux (lm) | 1385 |

Physical

| | |
|---------------------|-----------------|
| Color | Blue Tourmaline |
| Length (in) | 35.59 |
| Canopy height (in) | 2.283 |
| Net weight (lb) | 8.82 |
| Gross weight (lb) | 29.76 |
| Package height (in) | 12.6 |
| Package width (in) | 39.37 |
| Package length (in) | 39.37 |
| Package volume (in) | 19527.67 |
| IP internal | 20 |

Download

Mounting instructions

PDF


Photometric Files

LDT / IES

ZIP



Schematic light drawing



Photometric

| | |
|--------------------|-----------|
| Lighting type | Total |
| Light distribution | Symmetric |
| CCT (K) | 2700-2900 |
| CRI> | 90 |

Electrical

| | |
|--------------------|-------------------|
| Insulation class | I |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 100-240 |
| Driver | Integrated |
| Dimmable | Yes |
| Dimming type | Dimmer on board |
| Dimming interface | Dimmer Integrated |


Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F

Replaceable (LED only) light source by an end-user

Replaceable control gear by a professional

Spare Parts

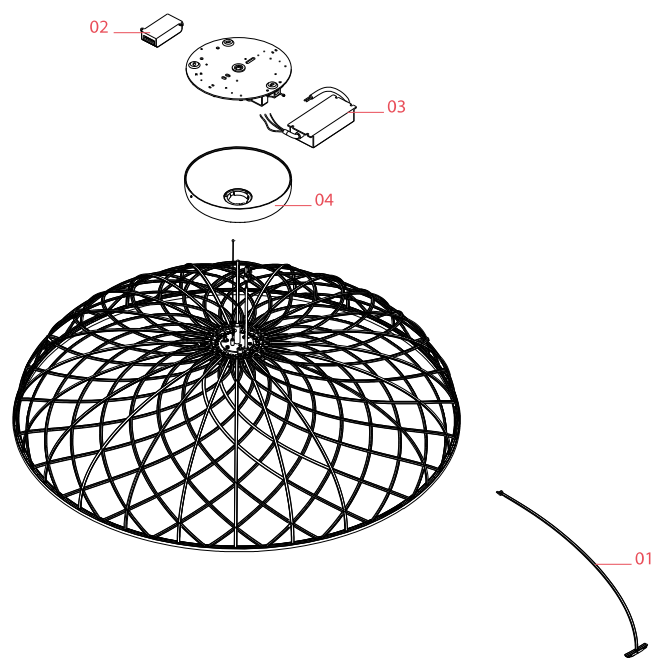

- | | | |
|-----|--|---------|
| 01. | Assembly Led Arm for Skynest Suspension Blue Tourmaline | RF34718 |
| 02. | Led dimmer kit | RF35452 |
| 03. | Skynest Suspension Driver 100W 100-277V | RF33061 |
| 04. | Rose for Skynest Ceiling Blue Tourmaline | RF35172 |



RF34718
Assembly Led Arm for Skynest
Suspension Blue Tourmaline



RF35452
Led dimmer kit



RF33061
Skynest Suspension Driver 100W
100-277V



RF35172
Rose for Skynest Ceiling Blue
Tourmaline