

# FLOS

D301F01C3EAF2 Steel


## SuperWire F

Designed by Formafantasma, 2024



56W - 4134lm - 2700K - CRI> 90

SuperWire is the first family of modular lamps designed by Formafantasma for Flos. A magical and poetic project, with an essential design but a great stage presence, which recalls the work of the great glass masters of the last century. Made of planar glass and polished aluminum, its design originated from the development of a custom-made light source that emits a warm and homogeneous light. Made up of one or more hexagons of planar glass connected by a polished aluminum element, SuperWire lights up its entire surface thanks to a new source: a very thin, flat, soft, flexible LED strip measuring up to one meter, which emits a warm and homogeneous light along its entire length and which can be easily removed for replacement and repair, unique in the panorama of LED bulb-less lamps. This floor version, is built with two 75 cm high modules, placed one above the other, resting on a steel tripod, a tribute to the historic Luminator by the Castiglioni brothers.

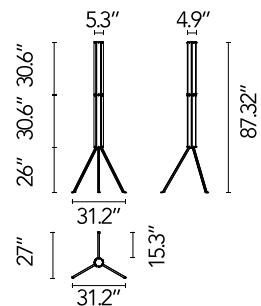

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8059607068304
Mounting	Floor
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Filament LED
Power (W)	56
System power (W)	56
System flux (lm)	4134

### Physical

Color	Steel
Length (in)	31.18
Cord color	Clear
Net weight (lb)	26.45
Gross weight (lb)	40.79
Package volume (in)	8593.64
IP internal	20

### Download

Mounting instructions



### Photometric Files

ULD



LDT / IES



### Technical Drawings

2D




3D






## Schematic light drawing



Beam Angle:		
h(m)	E(lx)	D(m)
1	0	
2	0	
3	0	
4	0	
5	0	

## Ecodesesign and Energy Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only light source by an end-user)



Replaceable control gear by an end-user


## Photometric

Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	90
Extreme cut off	No

## Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Remote included
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Dimmer Integrated
Plug type	Type A, Type C, Type G
Batteries inside	No

## Spare Parts

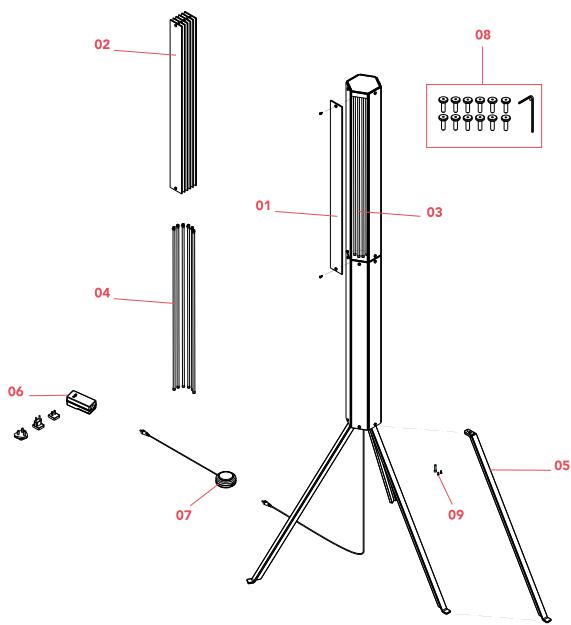

06. Black plug assembly kit & 48V  
driver

RF6600130



RF6600130

Black plug assembly kit & 48V  
driver