

FLOS

03.2006.14B Black

Bon Jour Ø 45


Designed by Philippe Starck, 2016



Recessed luminaire with LED light source. Remote 220/240V power supply included. It is necessary to anticipate a space for accessing the driver.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Power LED
Number of lamps	1
Power (W)	4.5
System power (W)	6
Source flux (lm)	605
Lumen Output (lm)	359

Physical

Colour	Black
Trim	Yes
Recessed depth (mm)	187
Bezel diameter (mm)	45
Net weight (kg)	0.13
Package volume (m3)	0.01
IP internal	20
IP external	44

Download

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ ZIP](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)



Schematic light drawing



Beam Angle: 19°

h(m)	E(lx)	D(m)
1	2468	0.34
2	617	0.67
3	274	1.01
4	154	1.34
5	99	1.68

Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
Rf fidelity index	91
Rg gamut index	98
LED Life / Failure Ratio	L80B20 >36000h (Tc=85°C)
Beam angle C0-180 (°)	19
Beam angle C90-270 (°)	19
UGR _L	<10

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Forward voltage (V)	11.5
LED current (mA)	400
Power supply	Remote included
Dimmable	No
Power supply type	Non Dimmable

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

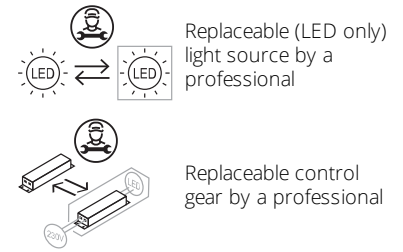

Notes

Accessories included (honeycomb and cross screening cylinder)