

FLOS

03.2003.01A7U White

Bon Jour Ø 90 Dim 0-10V 277V

UPGRADE


Designed by Philippe Starck, 2016



LED luminaire for recessed mounting into plasterboard ceilings. Once installed, the luminaire edge projects from the ceiling 0.39" creating a unique and very refined aesthetic effect. The luminaire's body is injection molded aluminium. It is available in three sizes: Bon Jour 45 (Ø 1.77"), 90 (Ø 3.54") and 145 (Ø 5.71"). Reflector made of anodized gloss aluminium with diffuser element made of polycarbonate.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



Main specifications

Mounting	Semirecessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Lamp category	LED
Number of lamps	1
Power (W)	16
System power (W)	17.5
Source flux (lm)	2040
System flux (lm)	885

Physical

Color	White
Trim	Yes
Orientation	Fixed
Recessed depth (in)	6.11
Length (in)	3.68
Net weight (lb)	1.17
Package volume (in)	916
IP internal	44

Download

Family spec sheet	ZIP
Mounting instructions	PDF

Photometric Files


LDT / IES	ZIP
-----------	-----

Technical Drawings

2D	ZIP
3D	ZIP



Schematic light drawing




Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
LED Life / Failure Ratio	L80B50 > 55.000h (Tc=85°C)
Beam angle C0-180 (°)	57
Beam angle C90-270 (°)	57
Extreme cut off	No

Electrical

Frequency (Hz)	50/60
Main voltage (Vac)	277
LED current (mA)	400
Driver	Remote included
Dimmable	Yes
Dimming type	Dimmable 0-10V
Dimming range (%)	1-100
Dimming interface	Remote Dimmable (Dimmer Not Included)

Ecodesign and Energy Labelling

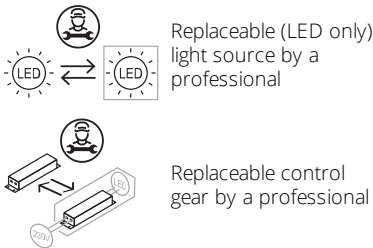

Notes

Pre-installation frame must be ordered separately. Class 2


Accessories & Power Supply



REQUIRED
Frame

08.8974.00

Pre-installation frame



OPTIONAL

TRAY-BonJour-90

Registration Tray for Bon Jour 90



OPTIONAL
Accessory

08.8976.14

Honeycomb and cross screening
cylinder for Bon Jour 90