

# FLOS


FA53905433-310 Anthracite

## Dooku 400 Double Top Pole Ø76 mm Foot&Cycle Optic Dimmable 1-10V NEW

Designed by FLOS Outdoor



LED source included. Integrated power supply 220-240V ON/OFF and dimmable 1-10V or DALI. Fixing bracket included. Equipped with a 400mm protruding neoprene cable section and IP68 connectors. Double socket for 76mm diameter post. The post must be ordered separately. Smart-City version available upon request.

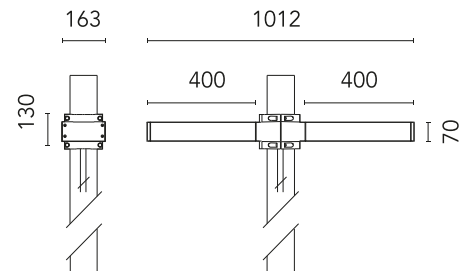

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8054793803296
Mounting	Pole Top
Power (W)	67
Source flux (lm)	18252
Lumen Output (lm)	15010


### Physical

Colour	Anthracite
Orientation	Fixed
Net weight (kg)	13.08
Package height (mm)	605
Package width (mm)	175
Package length (mm)	150
Package volume (m3)	0.02
IP internal	65

### Download

[Mounting instructions](#)  ZIP

### Photometric Files

[LDT / IES](#)  ZIP


### Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



## Schematic light drawing



Beam Angle:	41°	
h(m)	E(lx)	D(m)
1	1507	0.91
2	377	1.82
3	167	2.73
4	94	3.63
5	60	4.54

### Photometric

CCT (K)	3000
Extreme cut off	No

### Electrical

Power supply type	Dimmable 0-10V
Emergency	No

### Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

---