


FLOS

N70UEM4G02B Anodized Grey

In-Finity 70 Suspension Up & Down Emergency 4000K General Lighting

Designed by FLOS Architectural

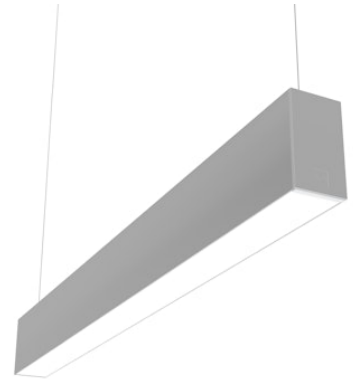

LED modular system for suspended installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules. Suspension kit included.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications


Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Power (W)	50

Physical

Colour	Anodized Grey
Trim	No
Orientation	Fixed
Length (mm)	1400
IP internal	20
IP external	20

Download

[Mounting instructions](#)



Photometric

Lighting type	Indirect, Direct
Light distribution	Symmetric
CCT (K)	4000
CRI>	80
Beam angle C0-180 (°)	103
Beam angle C90-270 (°)	103

Electrical

Insulation class	I
Power supply	Integrated
Dimmable	No
Power supply type	Non Dimmable
Emergency	No

Notes

Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. /
Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

Accessories & Power Supply



REQUIRED
Accessory

08.0030

Suspension kit



REQUIRED
Accessory

08.0031.00

Power supply rose



REQUIRED
Accessory

08.9057.02

Metal cover. Suspension Up & Down. 70 mm (Colour Anodized Grey)



5



REQUIRED
Accessory

08.9057.40

Metal cover. Suspension Up & Down. 70 mm (Colour White)



5



REQUIRED
Accessory

08.9057.NS

Metal cover. Suspension Up & Down. 70 mm (Colour Black)



5



OPTIONAL
Accessory

08.0110.00

500 mm opal diffuser. Diffuse, glare free and uniform lighting throughout the room