

## Light Shadow Adjustable Trim 8 Spots Optic Wide Flood - Non IC

Designed by FLOS Architectural, 2022



Recessed integrated luminaire with 8 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	21.6
Source flux (lm)	540
System flux (lm)	1773

### Physical

Color	Black/Black
Trim	Yes
Orientation	Adjustable
Longitudinal tilting (°)	30
IP internal	20

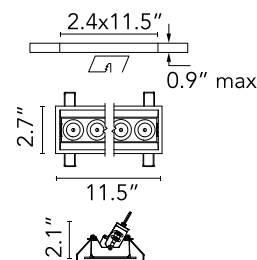

### Download


Family spec sheet [ZIP](#)  
Mounting instructions [PDF](#)

### Photometric Files


LDT / IES [ZIP](#)



### Ecodesign and Energy Labelling

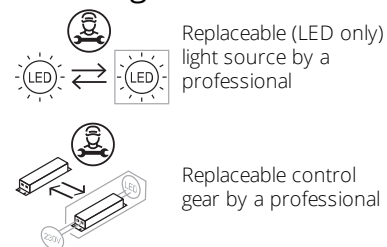

Schematic light drawing

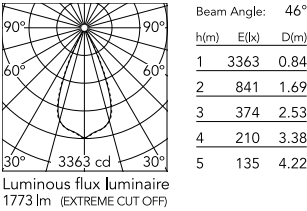

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	46
Beam angle C90-270 (°)	46
UGR <sub>L</sub>	<10


Electrical

Forward voltage (V)	24
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable ELV, Dimmable 0-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Pre-Installation frame not required.

Accessories & Power Supply

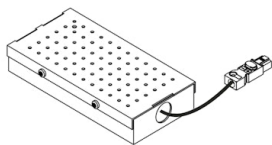


REQUIRED  
Power supply

SP25W900MA-120-A01  
Splice Box 9"x3.59"x1.25",  
900mA , 25W, 0-10V Dimmable,  
Thermal 120V



REQUIRED  
Power supply

SP25W900MA-277-A01  
Splice Box 9"x3.59"x1.25",  
900mA , 25W, 0-10V Dimmable,  
Thermal 277V



REQUIRED  
Power supply

SP30W900MA-ELV-U01  
Splice Box 7"x3.59"x1.25", 900mA  
, 30W, ELV Dimmable, Thermal  
120V