

FLOS

03.8865.14A Black/Black

Light Shadow Fixed No Trim 4 Spots Optic Spot

Designed by FLOS Architectural, 2022



Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included (220-240V).

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
Source flux (lm)	1140
Lumen Output (lm)	773

Physical

Colour	Black/Black
Trim	No
Orientation	Fixed
Recessed depth (mm)	75
Length (mm)	140
Net weight (kg)	0.34
IP internal	20
IP external	55



Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
-----------	-------

Technical Drawings


2D	↓ ZIP
3D	↓ ZIP
Bim	↓ ZIP



Schematic light drawing



Ecodesign and Energy Labelling

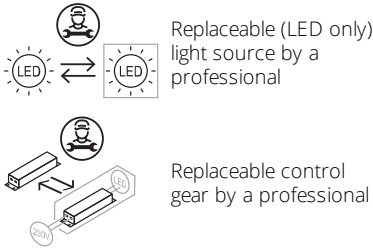

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	10
Beam angle C90-270 (°)	10
UGR _L	<10


Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Alternating current voltage (Vac)	230
Power supply	Remote included
Dimmable	No
Power supply type	Non Dimmable

Notes

It requires a pre-installation frame, to be ordered separately.

Accessories & Power Supply




REQUIRED
Frame

Installation

08.0511.00

Pre-installation No Trim Frame 4L
Fix



OPTIONAL
Accessory

Installation

08.0052.90

Accessory for mounting of No
Trim Fix continuous line.