


FLOS

05.0626.40.DA White/Black

Light Shadow Fixed Trim Dali Version 4 Spots Square Optic Flood NEW

Designed by FLOS Architectural, 2022

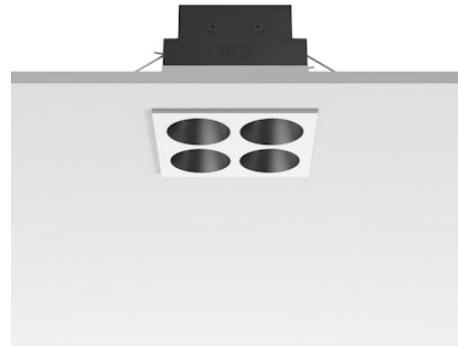


846lm - 3000K - CRI> 90 - Beam° 33

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included (220-240V). Pre-installation frame not required.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

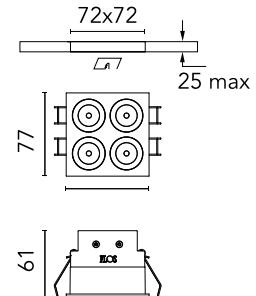

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Power LED
Number of lamps	1
System power (W)	10.8
Source flux (lm)	0
Lumen Output (lm)	846

Physical

Colour	White/Black
Trim	Yes
Orientation	Fixed
Net weight (kg)	0.34
Package height (mm)	16
Package width (mm)	14
Package length (mm)	21
IP internal	20
IP external	55

Download

Mounting instructions [PDF](#)

[PDF](#)

Photometric Files

LDT / IES

[ZIP](#)

Technical Drawings

2D


[ZIP](#)

3D

[ZIP](#)




Schematic light drawing



Beam Angle: 33°		
h(m)	E(k)	D(m)
1	2645	0.60
2	662	1.19
3	294	1.79
4	165	2.39
5	106	2.99

Ecodesign and Energy Labelling



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
LED Life / Failure Ratio	L80B10 > 50.000h (T _c =85°C)
Beam angle C0-180 (°)	33
Beam angle C90-270 (°)	33
UGR _L	<10

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
LED current (mA)	900
Power supply	Remote included
Dimmable	Yes
Power supply type	Dimmable DALI 2