

FLOS

03.9911.EQ.UQ Copper

Light Shadow Pro Ø 60 Fixed Optic Medium - Non IC NEW


Designed by FLOS Architectural, 2020



LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Lamp category	LED
Number of lamps	1
Power (W)	12.8
Source flux (lm)	-9
System flux (lm)	1166

Physical

Color	Copper
Orientation	Fixed
Net weight (lb)	0.49
Package height (in)	6.19
Package width (in)	8.27
Package length (in)	5.32
Package volume (in)	244.08
IP internal	54


Download

Family spec sheet [ZIP](#)
Mounting instructions [PDF](#)

Photometric Files

LDT / IES [ZIP](#)

Ecodesign and Energy Labelling

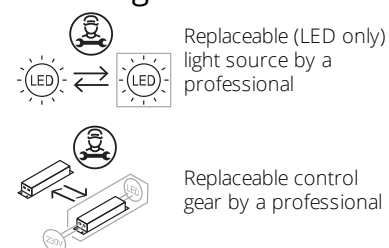

<https://professional.flos.com/en-US/us/product/light-shadow-pro-60-fixed-optic-medium-non-ic-03.9911.eq.uq/>


03.9911.EQ.UQ

©2022 Flos - P.IVA 00290820174 - 9/17/2025

professional.flos.com | info@flos.com 1/3

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	4000
CRI>	90
Rf fidelity index	92
Rg gamut index	100
LED Life / Failure Ratio	L80B50>50.000h (Tc=85°C)
Beam angle C0-180 (°)	25
Beam angle C90-270 (°)	25
UGR _L	<10


Electrical

Forward voltage (V)	93.8
LED current (mA)	350
Driver	Attached Splice Box
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Please select 250 mA setting in the remote driver to match the power of the Adjustable version.
Class 2 Listed.

Accessories & Power Supply




REQUIRED
Power supply
Electrical

SP30W350MA-120-U01
Splice Box UL 7"x2.22"x1.25",
With Driver Programmed to
350mA , 30W, 0-10V Dimmable,
Thermal 120V



REQUIRED
Power supply
Electrical

SP30W350MA-277-U01
Splice Box UL 7"x2.22"x1.25",
With Driver Programmed to
350mA , 30W, 0-10V Dimmable,
Thermal 277V



REQUIRED
Power supply
Electrical

SP30W350MA-ELV-U01
Splice Box UL 7"x2.22"x1.25",
With Driver Programmed to
350mA , 30W, ELV Phase
Dimmable, Thermal 120V




REQUIRED
Frame
08.0192.00
Installation Frame No Trim




REQUIRED
Frame
08.0160.14
Installation Frame Trim Ø60



REQUIRED
Frame
08.0160.40
Installation Frame Trim Ø60



OPTIONAL
Housing and Hanger Bar
TRAY-0001
Registration Tray - non electrical,
place holder for non IC new
construction, Ø2.95"



OPTIONAL
Housing and Hanger Bar
TRAY-0017
Registration Tray - non electrical,
place holder for non IC new
construction, UT57 Trim Ø3.56"