

Light Stripe 1200 mm Casambi integrated NEW


Designed by FLOS Architectural, 2020



Diffused LED light module to be installed in The Tracking Magnet System.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

Mounting	Track
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	24
System power (W)	24
Source flux (lm)	2018
Lumen Output (lm)	766
Efficacy (lm/W)	31.92

Physical

Colour	Black
Trim	No
Orientation	Fixed
Length (mm)	1200
Net weight (kg)	0.41
IP internal	20
IP external	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ ZIP](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)


[Bim](#) [↓ ZIP](#)



Schematic light drawing

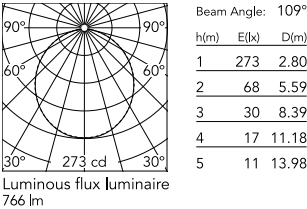

Ecodesign and Energy Labelling

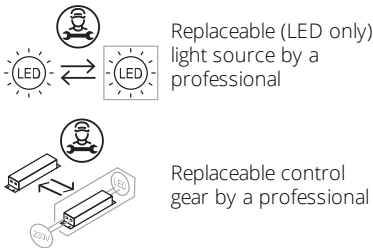

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	2
LED Life / Failure Ratio	L80B50 > 50.000h (Tc=85°C)
Beam angle C0-180 (°)	109
Beam angle C90-270 (°)	109

Electrical

Insulation class	III
Forward voltage (V)	48
LED current (mA)	500
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Dimmable Casambi
Dimming range (%)	20-100
Dimming interface	Remote Dimmable (Dimmer Not Included)
Emergency	No

Notes

Opal end covers not included. They must be ordered separately (08.0125.00 includes two units). The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® by Casambi.

Accessories & Power Supply



OPTIONAL
Accessory

08.0125.00

Opal End Caps for Tracking
Magnet Light Stripe. 2. unit kit