

# FLOS

03.8004.14.CB Black

## Light Stripe 1500 mm Casambi integrated NEW


Designed by FLOS Architectural, 2020



Diffused LED light module to be installed in The Tracking Magnet System.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



### Main specifications

Mounting	Track
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	30
System power (W)	30
Source flux (lm)	2523
Lumen Output (lm)	957
Efficacy (lm/W)	31.9

### Physical

Colour	Black
Trim	No
Orientation	Fixed
Length (mm)	1500
Net weight (kg)	0.52
IP internal	20
IP external	20

### Download

Mounting instructions [↓ PDF](#)

### Photometric Files

LDT / IES [↓ ZIP](#)

### Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)


[Bim](#) [↓ ZIP](#)



## Schematic light drawing



## Ecodesign and Energy Labelling

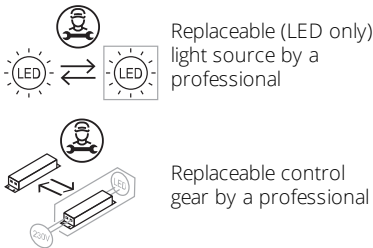

## Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	2
LED Life / Failure Ratio	L80B50 > 50.000h (Tc=85°C)
Beam angle C0-180 (°)	109
Beam angle C90-270 (°)	109

## Electrical

Insulation class	III
Forward voltage (V)	48
LED current (mA)	640
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Dimmable Casambi
Dimming range (%)	20-100
Dimming interface	Remote Dimmable (Dimmer Not Included)
Emergency	No

## Notes

Opal end covers not included. They must be ordered separately (08.0125.00 includes two units). The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® by Casambi.

Accessories & Power Supply



OPTIONAL  
Accessory

08.0125.00

Opal End Caps for Tracking  
Magnet Light Stripe. 2. unit kit