



## Outgraze 35 Easy - Tunable White L 600mm Forest Green

Designed by FLOS Outdoor, 2019



24V remote power supply and installation brackets to be ordered separately.  
Dimmable PWM luminaires. Sandblasted glass.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

|                        |                      |
|------------------------|----------------------|
| EAN                    | 8054793338507        |
| Mounting               | Wall                 |
| Environments           | Outdoor wet location |
| Light source type      | LED                  |
| Light sources included | Yes                  |
| LED type               | Power LED            |
| Number of lamps        | 1                    |
| Power (W)              | 9                    |
| Lumen Output (lm)      | 240                  |

### Physical

|                         |              |
|-------------------------|--------------|
| Colour                  | Forest Green |
| Trim                    | No           |
| Orientation             | Adjustable   |
| Transversal tilting (°) | 180          |
| Length (mm)             | 600          |
| Net weight (kg)         | 1.38         |
| Package height (mm)     | 665          |
| Package width (mm)      | 120          |
| Package length (mm)     | 125          |
| Package volume (m3)     | 0.01         |
| IP internal             | 66           |

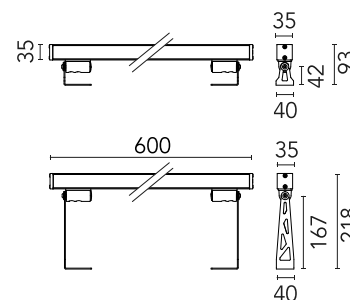

### Download

Mounting instructions [ZIP](#)

### Photometric Files

LDT / IES [ZIP](#)

### Technical Drawings


2D [ZIP](#)

3D [ZIP](#)


[Bim](#) [ZIP](#)




## Schematic light drawing

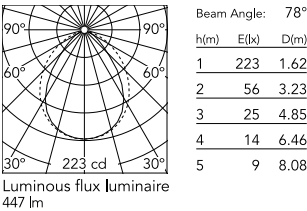

## Ecodesign and Energy Labelling



Replaceable (LED only)  
light source by a  
professional



Replaceable control  
gear by a professional

## Photometric

|                        |           |
|------------------------|-----------|
| Light distribution     | Symmetric |
| CCT (K)                | 2700-5700 |
| CRI>                   | 80        |
| Beam angle C0-180 (°)  | 90        |
| Beam angle C90-270 (°) | 90        |

## Electrical

|                    |   |
|--------------------|---|
| Insulation class   | III   |
| Frequency (Hz)     | 50/60                                       |
| Main voltage (Vac) | 24  |
| Power supply       | Remote                                      |
| Dimmable           | Yes   |
| Power supply type  | Dimmable DALI PWM,<br>Dimmable 1-10 PWM     |
| Dimming interface  | Remote Dimmable<br>(Dimmer Not<br>Included) |
| Emergency          | No  |

## Notes

We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.

During the installation and the maintenance of the fixtures it is important to be careful and avoid damages on the paint coating.

Damages on the coating exposed to outdoor conditions or water, could cause corrosion.

Chemical substances affect the anticorrosion covering protection.

For LED fixtures, there is evidence that most of the damages are connected to electrical effects related to the insulations, which cause destructive electrical discharges

These effects are frequently caused by:

- over voltage coming from the mains' network where fixture is connected.
- electrostatic discharge (ESD) coming from the environment.

The use of a protective device against the overvoltage on the electrical installation is warmly suggest this helps to reduce the intensity of some of these phenomenon and prevent irreversible damages. The selection of the type of device to be used must be adjust on the electrical plant.

Accessories & Power Supply



REQUIRED  
Power supply

F990B09A000  
CONTROL INTERFACE 24V PWM  
2CH - DALI IP20 CLASS III. Vin  
24Vdc 90W (POWER SUPPLY  
NOT INCLUDED)



REQUIRED  
Accessory

F990C00A000  
2 way terminal block 4 poles IP68  
H2O stop. (ø5,5÷12mm cable)



REQUIRED  
Accessory

F990C010000  
3/4 way terminal block 4 poles  
IP68 H2O stop. (ø5,5÷12mm  
cable)



REQUIRED  
Accessory

F1203012  
One pair of short brackets L 80  
mm. Forest Green



REQUIRED  
Accessory

F1204012  
One pair of long brackets L 200  
mm. Forest Green