

FLOS

F6582054 Aluminium

Serena

Designed by Patricia Urquiola, 2015


15W - 643lm - 2700K - CRI> 90



Adjustable table lamp providing indirect and reflected light. Extruded aluminium heatsink, photoengraved black PC cut-off, photoengraved optical PMMA diffuser. Reflector in sheared and folded pre-anodized aluminium. Power cord length 200 cm, with dimmer switch that provides ON-OFF functions and 10-100% light adjustment. Plug-in power supply with interchangeable plugs.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

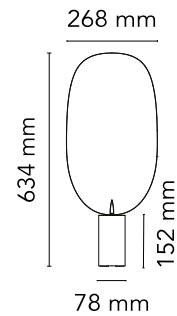

Main specifications

EAN	8059607006627
Mounting	Table
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	15
System flux (lm)	643

Physical

Colour	Aluminium
Net weight (kg)	1.2
Package volume (m3)	0.02
IP internal	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ LDT
---------------------------	-------

Technical Drawings

2D	↓ ZIP
3D	↓ ZIP



Schematic light drawing



Luminous flux luminaire
643 lm

Photometric

Lighting type	Indirect
Light distribution	Asymmetric
CCT (K)	2700
CRI>	90

Electrical


Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240/24
Driver	Remote included
Dimmable	Yes
Dimming type	Electronic 24V
Dimming interface	Dimmer Integrated
Plug type	Type G, Type A, Type C
Batteries inside	No
Charging min time	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only)
light source by a
professional



Replaceable control
gear by an end-user

Spare Parts

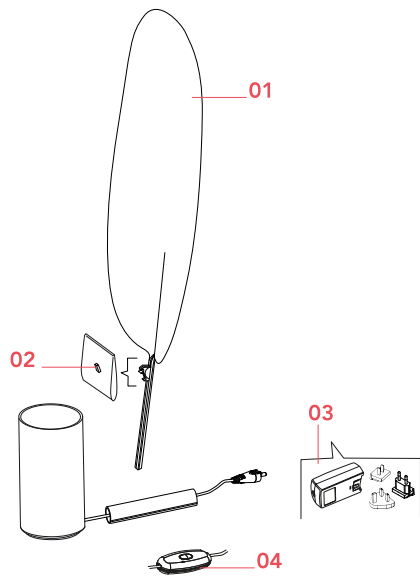

- | | | |
|-----|---|-----------|
| 01. | Anodized aluminum leaf reflector | F6581054 |
| 03. | Black plug assembly kit & 24V driver | RF3320100 |
| 04. | Jack plug with coaxial cable and dimmer | RF6605100 |

DOWNLOAD



F6581054

Anodized aluminum leaf reflector



RF3320100

Black plug assembly kit & 24V driver



RF6605100

Jack plug with coaxial cable and dimmer