

# FLOS

09.4470.14CDA Black

## UT Spot Ceiling Ø 57 Dali Version UPGRADE

Designed by FLOS Architectural, 2017



Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Ceiling surface     |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | LED array           |
| Lamp category          | LED                 |
| Number of lamps        | 1                   |
| Power (W)              | 15.5                |
| System power (W)       | 18.7                |
| Source flux (lm)       | 2179.6              |
| Lumen Output (lm)      | 1094                |

### Physical

|                          |            |
|--------------------------|------------|
| Colour                   | Black      |
| Trim                     | No         |
| Orientation              | Adjustable |
| Rotation (°)             | 360        |
| Longitudinal tilting (°) | 90         |
| Spot diameter (mm)       | 57         |
| Net weight (kg)          | 0.59       |
| IP internal              | 20         |



### Download

[Mounting instructions](#) [↓ PDF](#)

[Mounting instructions](#) [↓ PDF](#)

### Photometric Files

[LDT / IES](#) [↓ ZIP](#)


### Technical Drawings

[2D](#) [↓ ZIP](#)


[3D](#) [↓ ZIP](#)



## Schematic light drawing

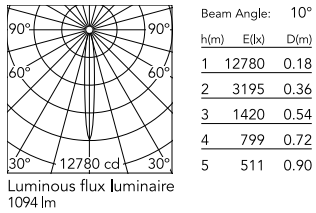

## Ecodesign and Energy Labelling

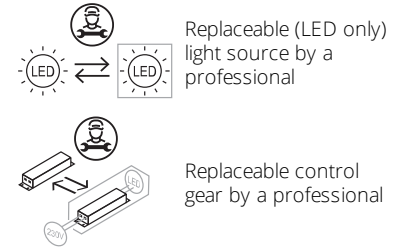

## Photometric

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| Light distribution     | Symmetric |
| CCT (K)                | 4000      |
| CRI>                   | 90        |
| Beam angle C0-180 (°)  | 10        |
| Beam angle C90-270 (°) | 10        |
| Extreme cut off        | No        |
| UGR <sub>L</sub>       | <10       |

## Electrical

|                    |                                       |
|--------------------|---------------------------------------|
| Insulation class   | II                                    |
| Frequency (Hz)     | 50/60                                 |
| Main voltage (Vac) | 220-240                               |
| Power supply       | Remote included                       |
| Dimmable           | Yes                                   |
| Power supply type  | Dimmable DALI 1                       |
| Dimming interface  | Remote Dimmable (Dimmer Not Included) |

## Notes

Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory.

## Accessories & Power Supply



OPTIONAL  
Accessory

Optical

08.0526.00

Snoot shielding cone



OPTIONAL  
Accessory

Optical

08.8428.00

Honeycomb



OPTIONAL  
Accessory

Optical

08.8429.00

Screening crosspiece



OPTIONAL  
Accessory

Optical

08.8431.00

Elliptical lens



OPTIONAL  
Accessory

Optical

08.8432.00

Flood lens



OPTIONAL  
Accessory

Optical

08.0526.40

Snoot shielding cone



OPTIONAL  
Accessory

Optical

08.0526.BW

Snoot shielding cone