

05.6206.40.RH All White

Workmates Surface Small High Efficiency 0-10V Dimming

NEW

Designed by FLOS Architectural, 2023



14W - 1725lm - 3500K - CRI> 90 - Beam° 72

Ceiling surface luminaire. High efficiency light source. Integrated driver. UGR<19. EN12464 - cd/m2 @ 65°<3000 compliant.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Number of lamps	1
Power (W)	14
System power (W)	14
Source flux (lm)	2186
System flux (lm)	1725

Physical

Color	All White
IP internal	20

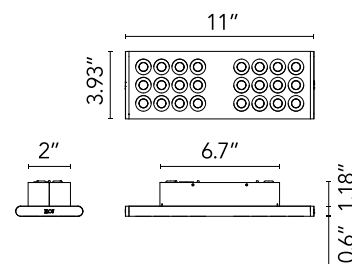

Download

Mounting instructions [Download PDF](#)

Photometric Files

LDT / IES [Download ZIP](#)


Technical Drawings

2D [Download ZIP](#)

3D [Download ZIP](#)



Schematic light drawing



Ecodesign and Energy Labelling

Replaceable (LED only) light source by a professional

Replaceable control gear by a professional

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3500
CRI>	90
Rf fidelity index	89
Rg gamut index	106
LED Life / Failure Ratio	L80B50>60.000h_Tc85°C
Beam angle C0-180 (°)	72
Beam angle C90-270 (°)	82
Extreme cut off	Yes
UGR _L	<16

Electrical

Frequency (Hz)	50/60
Main voltage (Vac)	120
Forward voltage (V)	34
LED current (mA)	350
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.