

FLOS

06.2500.40 White

Zero Track Surface Profile


Designed by FLOS Architectural, 2018



Electro-mechanical indoor profile for surface installation (ceiling or wall). To be fixed with specific screw plugs that come with the profile.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

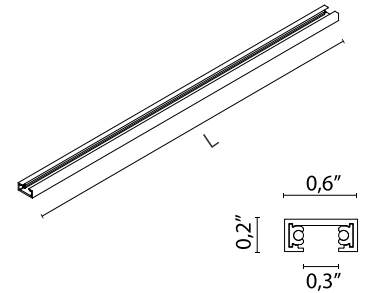

Main specifications

Mounting	Surface
Environments	Indoor dry location

Physical

Color	White
Trim	No
Length (in)	39.37
Net weight (lb)	0.46
IP internal	20

Download

Family spec sheet	ZIP
Mounting instructions	PDF



Electrical

Insulation class	III
LED voltage Vf (Vdc)	24.00
Driver	Remote excluded
Dimmable	Yes
Dimming type	Non Dimmable, Dimmable Casambi

Notes

It is necessary to order the power connector, intermediate connectors and covers separately. Feed unit connectors available as 90° flat corner and curve (symmetric element for left/right corner), ceiling/wall - wall/wall inner corner, as well as "T" and "X" shape. For vertical installations, installing the stopper is mandatory. It must be ordered separately.

PWM voltage output dimmable drivers shall be used at frequencies between 250 and 500Hz.

Accessories & Power Supply



REQUIRED
Power supply

LEDSB96W24V-NDM-D01
LED Driver, 24VDC, 96W, Non-Dimming, 120-277V




REQUIRED

06.2509.40
Zero Track Surface Profile. End Cap



REQUIRED
Power supply

Electrical
LEDSB60W24V-NDM-D01
LED Driver, 24VDC, 60W, Non-Dimming, 120-277V



REQUIRED

06.2540.40
Zero Track Surface Profile. Feed Unit for Remote Power Supply Unit



REQUIRED

06.2541.40
Zero Track Surface Profile. Feed intermediate connector



OPTIONAL
Accessory

08.0630.40
Stopper



OPTIONAL

06.2506.40
Zero Track Surface Profile. Intermediate Connector



OPTIONAL
Corner

06.2542.40
Zero Track Surface Profile. 90° Flat Corner



OPTIONAL
Corner

06.2543.40


Zero Track Surface Profile.
Ceiling/wall - wall/wall inner corner



OPTIONAL
Corner

06.2544.40

Zero Track Surface Profile.
Interior ceiling/ceiling-wall/wall
curve



OPTIONAL
Corner

06.2545.40

Zero Track Surface Profile. T-
shaped connector



OPTIONAL
Corner

06.2546.40

Zero Track Surface Profile. Cross-
shaped connector